



ARES 1 Multifunction complete cubicle with steam



ARES

Ares



PVD CHROME FINISH



CRYSTAL CLEAR TREATMENT



ARES 3 Multifunction complete cubicle with steam

Ares 3

Safety glass 6 mm complying with European Standards **UNI EN 14428**

CHROME PROFILES

Code: **ARES3-1KA** = **ARES3-1K** + **A**


How to choose your product using the codes:

ARES3-1K	A	P	Q	T
----------	---	---	---	---


Mixer	Measurements (cm)	Access	Code	HPL finish	Price
-------	-------------------	--------	------	------------	-------

Ares 3 - Multifunction complete cubicle with steam

Wall-mounted version

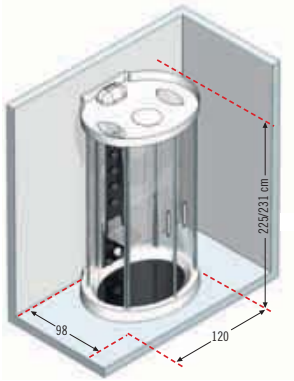

Corner-mounted version

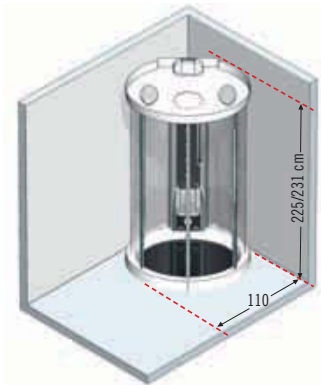

CROMOLIGHT PLUS VERSION

				A	P	Q	T	
WITH TRAY H 10 CM				white	ash	white oak	teak	
THERMOSTATIC	120 x 98 H 225	85	ARES3-1K					
WITH TRAY H 16 CM								
THERMOSTATIC	120 x 98 H 231	85	ARES3P-1K					

FEATURES: Dome, Adjustable vertical hydromassage, Shower head, Shower hand, Folding seat in leafy HPL with wood finish, Soap holders, Shower tray base in leafy HPL with wood finish, Sauna plus (steam and aroma dispenser, Radio FM RDS Stereo, MP3 AUX plug, Chromo light lamp), Touch screen remote control

OPTIONAL

CORNER MOUNTING KIT	ARKAN1		
---------------------	---------------	--	--



Compulsory
Imperial to Metric flex waste adaptor

Code	RISCCAB
Price	

Features page 146, technical diagrams page 148.

Technical data

Glass types



Clear

Profile colours



Silver



Chrome (only Ares 3)

Treatment



CRYSTAL CLEAR TREATMENT
Leaves glass easy to clean.
Does not support the growth of bacteria and scale.



PVD CHROME FINISH
Zero emission integrated cycle,
100% environment-friendly.
Antiscale, antibacteria, ecological,
long-time shining resistance.

Leafy HPL with wood finish (Ares 3 only)



white



ash



white oak



teak

Leafy HPL is a material with a very resistant surface to scratches, abrasion, water and heat.

Leafy HPL is easily cleaned and therefore ideal for applications where the hygiene is essential, as in the bathroom.

Features



Dome with chromo light, fixed shower head, cascade, 2 loudspeakers



Aroma dispenser



Electronic panel (Ares 1 only)




Touch screen Remote Control (Ares 3 only)


Technical Diagrams

ARES 1

WALL-MOUNTED VERSION

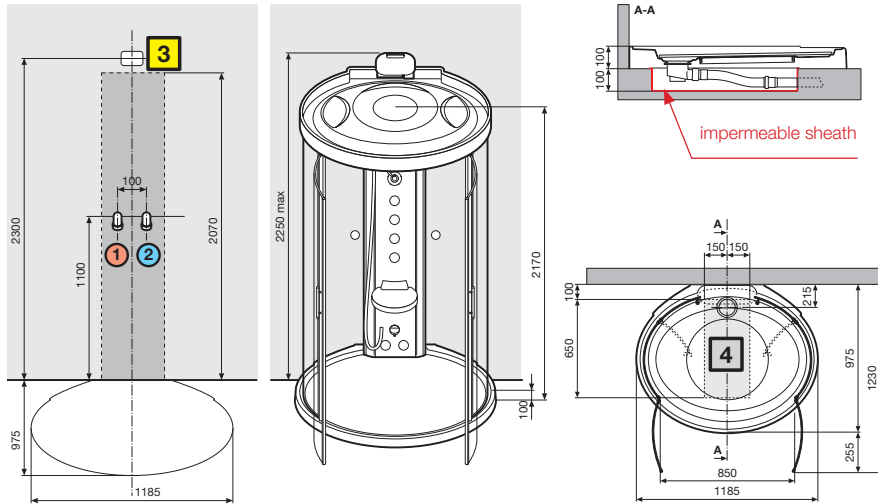

CORNER-MOUNTED VERSION

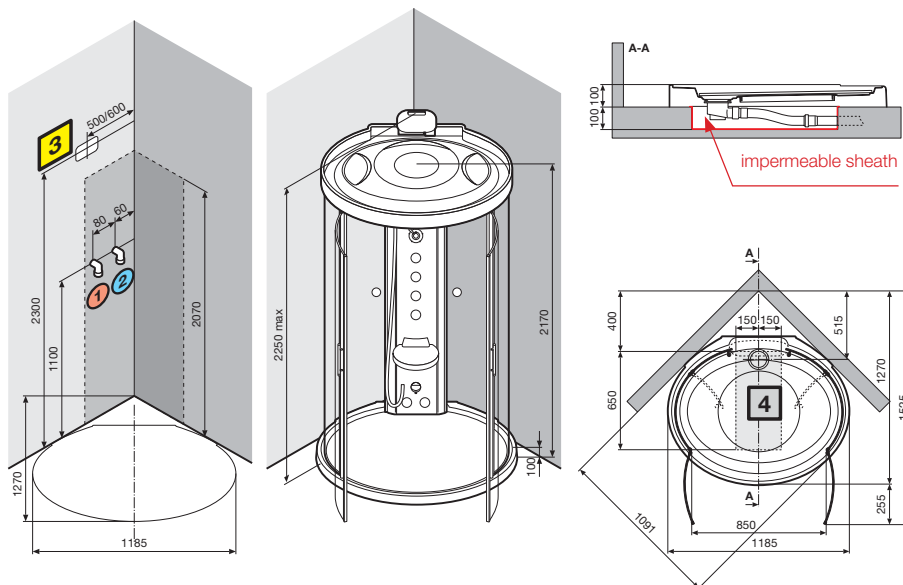

Must be fitted upstream with a 30 mA circuit breaker with a minimum contact of 3mm.

HYDRAULIC CHARACTERISTICS


- Optimum dynamic pressure 2-5 bar
- 1/2" hot water connection
- Cold water connection 1/2"
- Siphon connection with 40 mm diameter coupling

ELECTRICAL CHARACTERISTICS


- Voltage 220-230 V
- Frequency 50/60 Hz
- Maximum absorbed power: 3300 W
- Nominal power 2500 W

ARES 3

WALL-MOUNTED VERSION

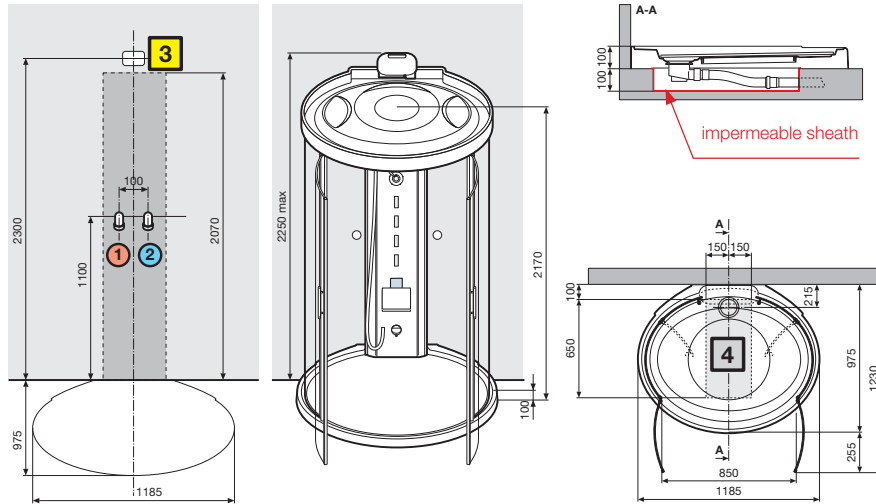

CORNER-MOUNTED VERSION

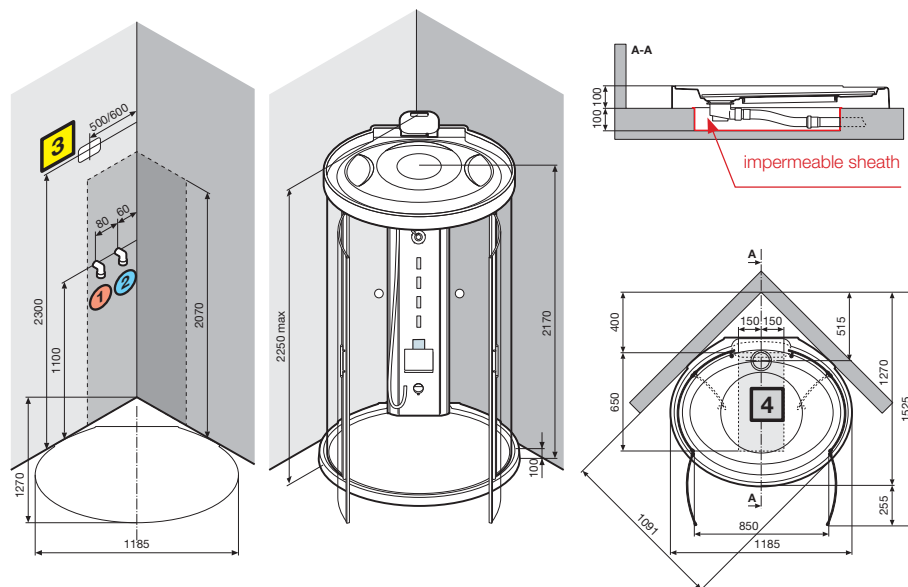

Must be fitted upstream with a 30 mA circuit breaker with a minimum contact of 3mm.

HYDRAULIC CHARACTERISTICS

- Optimum dynamic pressure 2-5 bar
- 1/2" hot water connection
- Cold water connection 1/2"
- Siphon connection with 40 mm diameter coupling

ELECTRICAL CHARACTERISTICS

- Voltage 220-230 V
- Frequency 50/60 Hz
- Maximum absorbed power: 3300 W
- Nominal power 2500 W



WARNING: it could be dangerous for pacemaker wearer.