

# Equipped panels



Feel 2 Soul 4 Equipped panel




Feel 2 Soul 3 Equipped panel




Feel 2 Soul 5 Equipped panel



FEEL 1

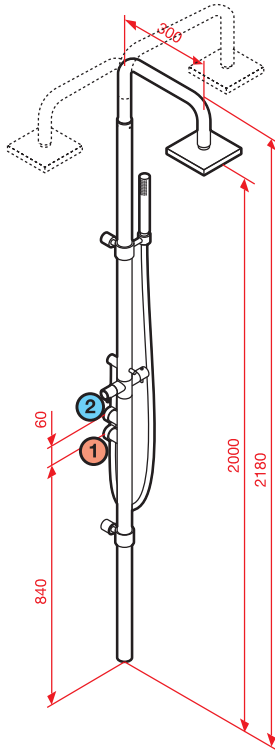

FEEL 2 SOUL 1

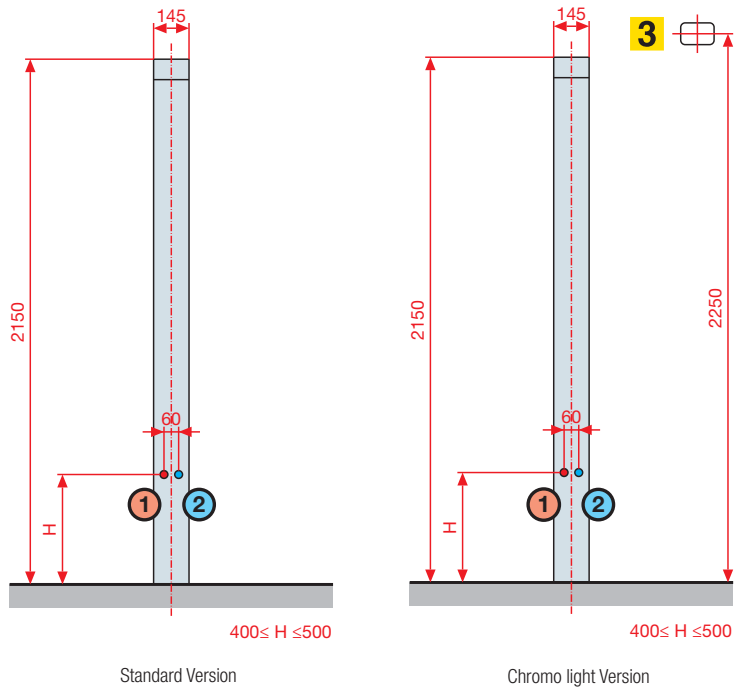

The whirlpool bath system must be fitted upstream with a 30 mA circuit breaker with a minimum contact of 3mm.


**HYDRAULIC CHARACTERISTICS**

- Optimum dynamic pressure 2-5 bar
- 1/2" hot water connection
- Cold water connection 1/2"


**ELECTRICAL CHARACTERISTICS**

- Voltage 220-230 V
- Frequency 50 Hz
- Nominal power: 10 W

## FEEL 2 SOUL 2

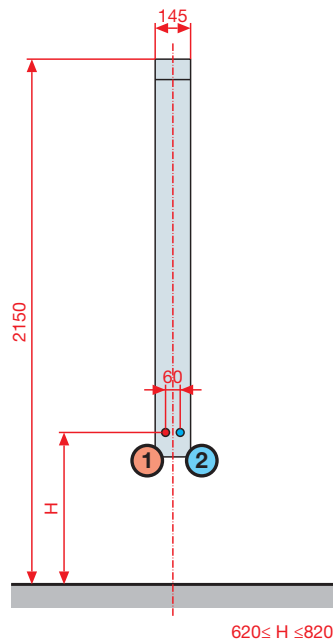


Standard Version

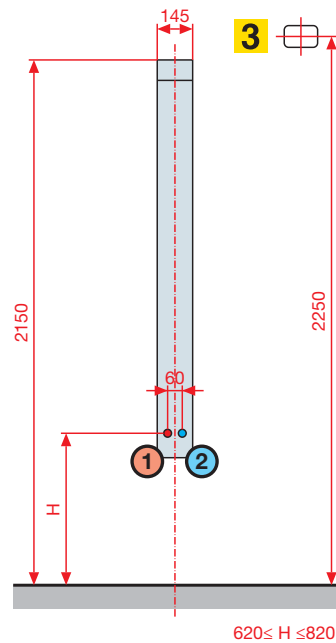


Chromo light Version

## FEEL 2 SOUL 3

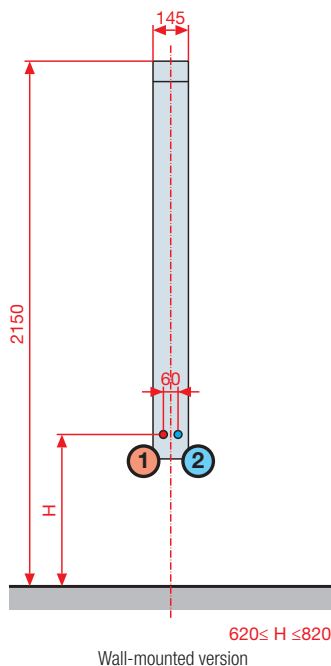

Wall-mounted version

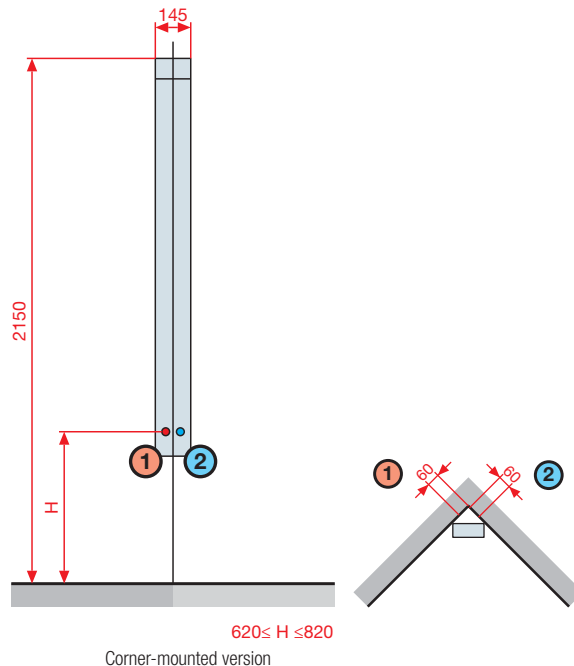

Corner-mounted version



The whirlpool bath system must be fitted upstream with a 30 mA circuit breaker with a minimum contact of 3mm.

### HYDRAULIC CHARACTERISTICS


- Optimum dynamic pressure 2-5 bar
- 1/2" hot water connection
- Cold water connection 1/2"

### ELECTRICAL CHARACTERISTICS


- Voltage 220-230 V
- Frequency 50 Hz
- Nominal power: 10 W

## Equipped panels colours

### Styrene



white



mirror

### Leafy HPL with wood finish



ash



white oak



teak

Leafy HPL is a material with a very resistant surface to scratches, abrasion, water and heat.

Leafy HPL is easily cleaned and therefore ideal for applications where the hygiene is essential, as in the bathroom.

### Features



Chromo light (Soul 1, Soul 2 only)